Section II. AUXILIARY SIGNS

The main signs (see section I) may be supplementeed by the following auxiliary signs:


1. Panels showing the distance at which the regulation applies or the special feature indicated by the main sign is to be found

Note: The panels are placed above the main sign.

Examples:



In 1,000 m, stop



In 1,500 m, ferry-boat not moving independently


2. Additional luminous signal

Luminous white arrow combined with certain lights, with the following meanings:









(a) With green light

Example: Permission to enter the basin to which the arrow is pointing




(b) With red light

Example: No entry to the basin to which the arrow is pointing

3. Pointers showing the direction of the section to which the main sign applies

The pointers need not necessarily be white and may be placed beside or below the main Note: sign.

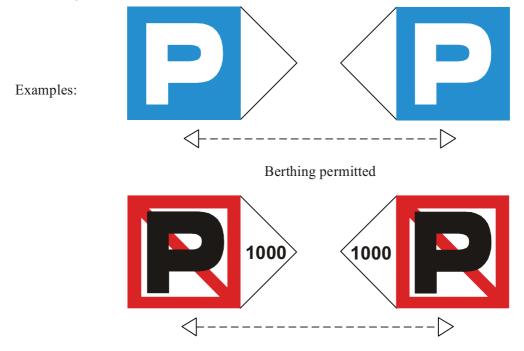

Berthing prohibited (over a distance of 1,000 m)

4. Panels giving explanations or additional information

Note:

Examples:

